
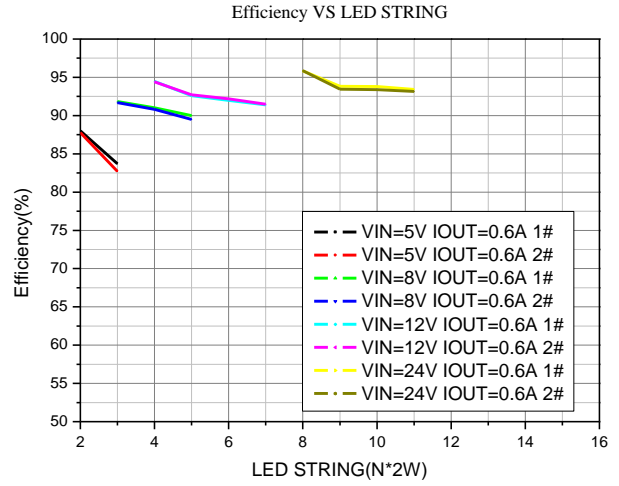


XL6008+LM358 参考数据

1. 输出功率及效率

测试条件，输入电压 5V/8V/12V/24V，输出 LED 灯串 2-16 串，输出电流 0.3A/0.6A。

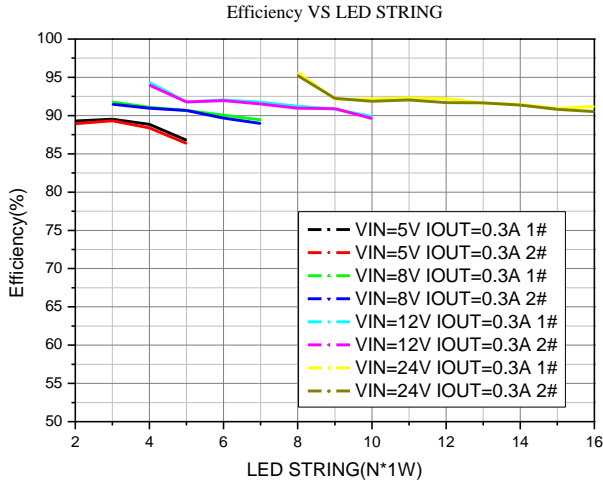

2. 线性调整率与负载调整率

测试条件，输入电压 5V/8V/12V/24V，输出 LED 灯串 2-16 串，输出电流 0.3A/0.6A。

